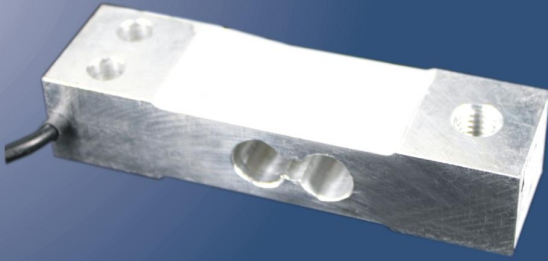


**SZJOINT**Joint Sensor Instruments (H. K.) Ltd.
Joint Sensor Instruments (Shenzhen) Ltd.

FAK-2

平行梁式称重传感器
Parallel Beam Load Cell

材质： 铝合金

Materials: Aluminum alloy

FAK-2型采用铝合金材质，无色阳极氧化处理，硅胶密封，Ip65，带数字模块、485接口。适用于工业自动化和健康器材设备等。

Model FAK-2 is constructed using aluminum alloy material, colorless anodized, silicon rubber seal, Ip65. It comes with a digital module, 485 interface

Application: Automatic industrial devices and healthcare apparatus.

主要技术指标 Specifications

量程 Capacity	160KG
综合误差 Comprehensive Error	C3
输出灵敏度 Output Sensitivity	2.0±0.2mV/V
非线性 Nonlinearity	±0.02%F.S
重复性 Repeatability	±0.02%F.S
滞后性 Hysteresis	±0.02%F.S
蠕变 Creep	±0.02%(20min)F.S
零点温度漂移 Temperature effect on Zero	≤±0.02%F.S/10℃
额定输出温度漂移 Temperature effect on Output	≤±0.02%F.S/10℃
零点输出 Zero Output	±0.04mV/V
输入电阻 Input resistance	1157±10Ω
输出电阻 Output resistance	1000±2Ω
绝缘电阻 Insulation Resistance	≥2000MΩ/100VDC
推荐激励电压 Excitation Voltage	5~10(DC)V
工作温度范围 Temperature compensated	0~40℃
安全过载 Safe overload	150%F.S

